

FASTLINK™ ANCHOR STRAP

The FastLink Anchor Strap connects a 12 mm Delta Quick Link and a ProTech™ Auto-Lock Carabiner with keeper. This strap is secured by connecting the carabiner directly to the Quick Link. The Quick Link remains screwed shut and serves as a focal attachment point that mitigates risk of tri-axial or cross loading. Confirm that the carabiner and Quick Link are locked and secured prior to loading the system. This model is classified to NFPA standards for Basket (U) and End-to-End configurations.

WARNING: The FastLink™ Anchor Strap should not be used in a Choker configuration as this may put a side load on the carabiner.

Basket (U)

- Pass the strap around the anchorage in a doubled U-shape.
- Connect the carabiner to the Quick Link. The Quick Link becomes a focal attachment point that mitigates the risk of tri-axial or cross loading. Do not use the carabiner as the focal attachment point.
- This configuration offers the highest classified strength rating for CMC Anchor Straps.

End-To-End

- Connect one end of the anchor strap to a designated anchor point.
- Use the opposing free end as a single connection point.
- Consider orienting the strap so the carabiner is used for connecting single elements and the Quick Link is used for connecting multiple elements.
- Compared to the Basket (U) configuration, End-to-End has a lower strength rating.

CARRYING, MAINTENANCE & STORAGE

During all use, carrying, storage, and transport keep the equipment away from acids, alkalis, exhaust emissions, rust and strong chemicals. Do not expose the equipment to direct heat, flame, or high temperatures or other adverse environmental conditions. If the equipment becomes soiled, it can be washed in cold water with a mild detergent that is safe for use with nylon and polyester. Rinse thoroughly. Do not use a pressure washer. Air dry in temperatures between 10° C and 30° C. Do not dry the equipment in direct sunlight or using an automatic dryer. Lubricate moving parts as needed. During storage and transport, protect the equipment from heat, direct sunlight, moisture, chemicals, and external loads or impacts. Do not store where the equipment may be exposed to moist air, particularly where dissimilar metals are stored together. Consult with the manufacturer in case of any doubt.

WARRANTY & REPAIRS

If your CMC product has a defect due to workmanship or materials, please contact CMC Customer Support at info@cmcprou.com for warranty information and service. CMC's warranty does not cover damages caused by improper care, improper use, alterations and modifications, accidental damage or the natural breakdown of material over extended use and time. All repair work shall be performed by the manufacturer. All other work or modifications void the warranty and releases CMC from all liability and responsibility as the manufacturer.


SAMPLE INSPECTION AND MAINTENANCE LOG

The following sample log provides an example of the records that should be maintained by the purchaser or user of life safety equipment.

EQUIPMENT INSPECTION AND MAINTENANCE LOG			
Item _____ # _____ Date in Service _____			
Brand/Model _____ Strength _____			
Date	How Used or Maintained	Comments	Name



ANCHOR STRAPS

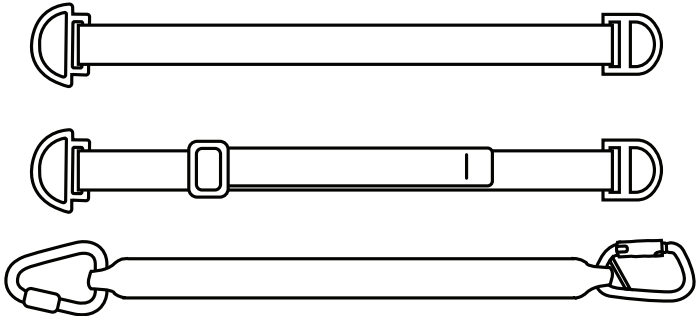

⚠ WARNINGS

Activities involving the use of this device are potentially dangerous. You are responsible for your own actions and decisions. Before using this device, you must:

- Read and understand these user instructions, labels, and warnings.
- Familiarize yourself with its capabilities and limitations.
- Obtain specific training in its proper use.
- Understand and accept the risks involved.

FAILURE TO HEED ANY OF THESE WARNINGS MAY RESULT IN SEVERE INJURY OR DEATH.

Legend



Imminent risk of serious injury or death.



Appropriate function or use.



Imminent risk of accident or injury.



Equipment incompatibility.



CMC Rescue, Inc.
6740 Cortona Drive
Goleta, CA 93117, USA
805-562-9120 / 800-235-5741
cmcprou.com

Find the latest version of this manual at cmcprou.com.

